

Servicing vacuum pump 2F-3

The lightest and fastest vacuum pump

Oil sealed rotary vane vacuum pump (two stages) manufactured with the latest technology and specifically designed for air conditioning and refrigeration service.



design features

- New Look:** A compact construction, simple design and easy operation.
- Ergonomic handle:** Easy to carry and use.
- Motor:** Thermally protected. Capacitor protected in plastic enclosure. Independent cable.


- Integrated Gas Ballast valve:** Helps keep the pump oil clean for a longer time.
- Oil forced lubrication:** Useful for long time operation.
- Integral check valve:** A safety feature prevents pump oil from being sucked into the system when the pump stops.
- Fully tested:** Each pump is tested and inspected individually.

specifications

FEATURES	UNITS	2F-3
Free air displacement at 50/60 Hz	m ³ /h	3/3,6
Number of stages	-	2
Factory vacuum rating	microns	25
Intake fittings	-	1/4" SAE
Motor size	kW	0,18
Voltage 230V* 50/60 Hz	rpm	2800/3360
Weight (with oil)	kg	7
Oil capacity	l	0,3
Noise level 50/60 Hz	dB	65/70
Low operation temperature	°C	5°
High operation temperature	°C	40°

*Standard. Other voltages available upon request

DIMENSIONS (mm)

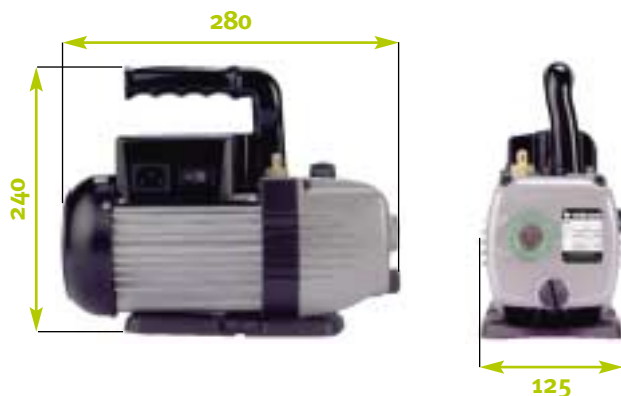

manufactured by



TELSTAR INDUSTRIAL, S.L.
CORPORATE HEADQUARTERS
 Josep Tapiolas, 120
 08226 TERRASSA (Spain)
 Tel. +34 937 36 16 00
 Fax +34 937 85 93 42
 E-mail: telstar@etelstar.com

TELSTAR INT'L, Ltd.
 JRM 712 Jingguang Centre
 Office Building
 BEIJING (China)
 P.O.: 100020
 Tel. +86 10 65 26 11 13/4
 Fax +86 10 65 13 97 17
 E-mail: telstar@telstar.com.cn



Servicing vacuum pump 2F-6

Specifically designed for air conditioning and refrigeration systems

Oil sealed rotary vane vacuum pump (two stages), manufactured with the latest technology and specifically designed for air conditioning and refrigeration service.



design features

- Ergonomic handle:** Easy to carry and use.
- Motor:** Thermally protected.
- Integrated gas ballast valve:** Helps keep the pump oil clean for a longer time.


- Oil forced lubrication:** Useful for long time operation.
- Integral check valve:** A safety feature prevents pump oil from being sucked into the system when the pump stops.
- Fully tested:** Each pump is tested and inspected individually.

specifications

FEATURES	UNIT.	2F-6
Free air displacement at 50/60 Hz	m ³ /h	6/7.2
Number of stages	-	2
Factory vacuum rating	microns	25
Intake fittings	-	3/8"SAE
Motor size	kW	0.37
Voltage 230V* 50/60 Hz	rpm	2800/3360
Weight (with oil)	kg	15
Oil capacity	l	0.65
Noise level 50/60 Hz	dB	66/70
Low operation temperature	°C	5°
High operation temperature	°C	40°

* Standard. Other voltages available upon request.

DIMENSIONS (mm)

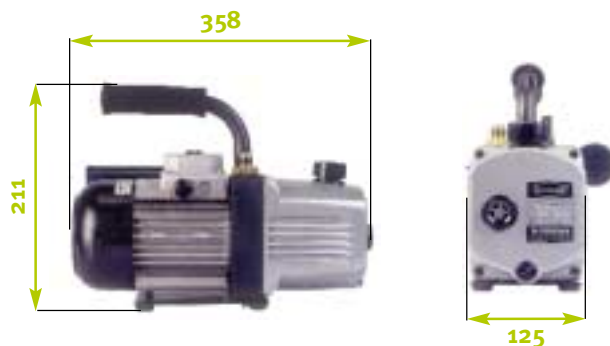

manufactured by



TELSTAR INDUSTRIAL, S.L.
CORPORATE HEADQUARTERS
Josep Tapiolas, 120
08226 TERRASSA (Spain)
Tel. +34 937 36 16 00
Fax +34 937 85 93 42
E-mail: telstar@etelstar.com



TELSTAR INT'L Ltd
RM 712 Jingguang Centre
Office Building
BEIJING (China)
P.O.: 100020
Tel. +86 10 65 26 11 13/4
Fax +86 10 65 13 97 17
E-mail: telstar@telstar.com.cn

Servicing vacuum pump 2F-9

Specifically designed for air conditioning and refrigeration systems

Oil sealed rotary vane vacuum pump (two stages), manufactured with the latest technology and specifically designed for air conditioning and refrigeration service.



design features

- Ergonomic handle:** Easy to carry and use.
- Motor:** Thermally protected.
- Integrated gas ballast valve:** Helps keep the pump oil clean for a longer time.


- Oil forced lubrication:** Useful for long time operation.
- Integral check valve:** A safety feature prevents pump oil from being sucked into the system when the pump stops.
- Fully tested:** Each pump is tested and inspected individually.

specifications

FEATURES	UNIT.	2F-9
Free air displacement at 50/60 Hz	m ³ /h	9/10.8
Number of stages	-	2
Factory vacuum rating	microns	25
Intake fittings	-	1/2"SAE
Motor size	kW	0.37
Voltage 230V* 50/60 Hz	rpm	2800/3360
Weight (with oil)	kg	15.5
Oil capacity	l	0.6
Noise level 50/60 Hz	dB	66/70
Low operation temperature	°C	5°
High operation temperature	°C	40°

* Standard. Other voltages available upon request.

DIMENSIONS (mm)

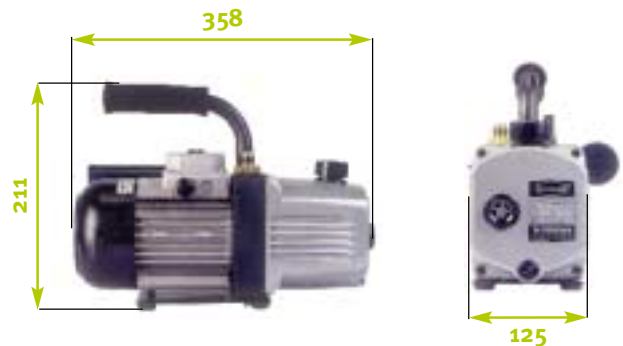

manufactured by



TELSTAR INDUSTRIAL, S.L.
CORPORATE HEADQUARTERS
Josep Tapiolas, 120
08226 TERRASSA (Spain)
Tel. +34 937 36 16 00
Fax +34 937 85 93 42
E-mail: telstar@etelstar.com



TELSTAR INT'L, Ltd
RM 712 Jingguang Centre
Office Building
BEIJING (China)
P.O.: 100020
Tel. +86 10 65 26 11 13/4
Fax +86 10 65 13 97 17
E-mail: telstar@telstar.com.cn